



**Mono**

## 390W PERC Half-Cell Module JAM72S03 370-390/PR Series

### Introduction

Assembled with high-efficiency PERC cells, the half-cell configuration of the modules offers the advantages of higher power output, better temperature-dependent performance, reduced shading effect on the energy generation, lower risk of hot spot, as well as enhanced tolerance for mechanical loading.



Higher output power



Lower temperature coefficient




Less shading effect



Better mechanical loading tolerance

### Superior Warranty

- 12-year product warranty
- 25-year linear power output warranty

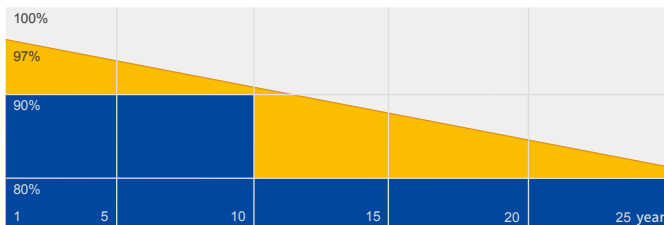


■ JA Linear Power Warranty ■ Industry Warranty

### Comprehensive Certificates

- IEC 61215, IEC 61730, IEC TS 62804
- ISO 9001: 2015 Quality management systems
- ISO 14001: 2015 Environmental management systems
- OHSAS 18001: 2007 Occupational health and safety management systems
- IEC TS 62941: 2016 Terrestrial photovoltaic (PV) modules – Guidelines for increased confidence in PV module design qualification and type approval



MECHANICAL DIAGRAMS

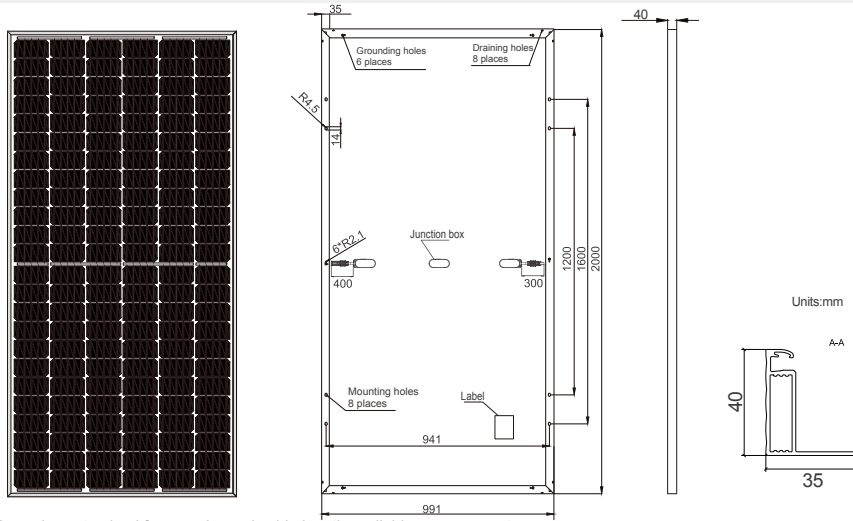

SPECIFICATIONS

Cell	Mono
Weight	22.5kg±3%
Dimensions	2000mm×991mm×40mm
Cable Cross Section Size	4mm <sup>2</sup>
No. of cells	144 (6×24)
Junction Box	IP68, 3 diodes
Connector	MC4 Compatible(1000V) QC 4.10-35(1500V)
Packaging Configuration	27 Per Pallet

ELECTRICAL PARAMETERS AT STC

TYPE	JAM72S03 -370/PR	JAM72S03 -375/PR	JAM72S03 -380/PR	JAM72S03 -385/PR	JAM72S03 -390/PR
Rated Maximum Power(Pmax) [W]	370	375	380	385	390
Open Circuit Voltage(Voc) [V]	47.56	47.78	48.05	48.32	48.61
Maximum Power Voltage(Vmp) [V]	39.36	39.58	39.80	40.07	40.34
Short Circuit Current(Isc) [A]	9.97	10.03	10.09	10.15	10.21
Maximum Power Current(Imp) [A]	9.41	9.48	9.55	9.61	9.67
Module Efficiency [%]	18.7	18.9	19.2	19.4	19.7
Power Tolerance	0~+5W				
Temperature Coefficient of Isc(α <sub>Isc</sub> )	+0.051%/°C				
Temperature Coefficient of Voc(β <sub>Voc</sub> )	-0.289%/°C				
Temperature Coefficient of Pmax(γ <sub>Pmp</sub> )	-0.360%/°C				
STC	Irradiance 1000W/m <sup>2</sup> , cell temperature 25°C, AM1.5G				

Remark: Electrical data in this catalog do not refer to a single module and they are not part of the offer.They only serve for comparison among different module types.

ELECTRICAL PARAMETERS AT NOCT


TYPE	JAM72S03 -370/PR	JAM72S03 -375/PR	JAM72S03 -380/PR	JAM72S03 -385/PR	JAM72S03 -390/PR
Rated Max Power(Pmax) [W]	274	278	281	285	289
Open Circuit Voltage(Voc) [V]	44.06	44.28	44.51	44.80	45.04
Max Power Voltage(Vmp) [V]	36.37	36.59	36.81	37.05	37.29
Short Circuit Current(Isc) [A]	7.98	8.02	8.08	8.13	8.18
Max Power Current(Imp) [A]	7.53	7.58	7.64	7.69	7.74
NOCT	Irradiance 800W/m <sup>2</sup> , ambient temperature 20°C, wind speed 1m/s, AM1.5G				

OPERATING CONDITIONS


Maximum System Voltage	1000V/1500V DC(IEC)
Operating Temperature	-40°C~+85°C
Maximum Series Fuse	20A
Maximum Static Load,Front	5400Pa
Maximum Static Load,Back	2400Pa
NOCT	45±2°C
Application Class	Class A

CHARACTERISTICS

Current-Voltage Curve JAM72S03-370/PR



Power-Voltage Curve JAM72S03-370/PR



Current-Voltage Curve JAM72S03-370/PR

